

REKLUSE



REKLUSE MOTOR SPORTS

The z-Start Pro Clutch

INSTALLATION GUIDE

KTM85

KTM105

191-831


Manual Revision: 032508

©2002 Rekluse Motor Sports
Rekluse Motor Sports, Inc.
110 E. 43rd Street
Boise, Idaho 83714
208-426-0659
support@rekluse.com

TABLE OF CONTENTS

z-START PRO CROSS-SECTION VIEW	3
INCLUDED PARTS	3
REQUIRED TOOLS	3
BIKE PREPARATION AND DISASSEMBLY	4
CLUTCH BASKET INSPECTION	5
INSTALLING THE z-START PRO CENTER CLUTCH	6
INSTALLING THE CLUTCH PACK	6
INSTALLING THE z-START PRO CLUTCH	7
DETERMINE THE INSTALLED GAP OF THE z-START PRO CLUTCH	9
APPENDIX A – CENTER CLUTCH REMOVAL TIP SHEET	10

Z-START PRO CROSS-SECTION VIEW

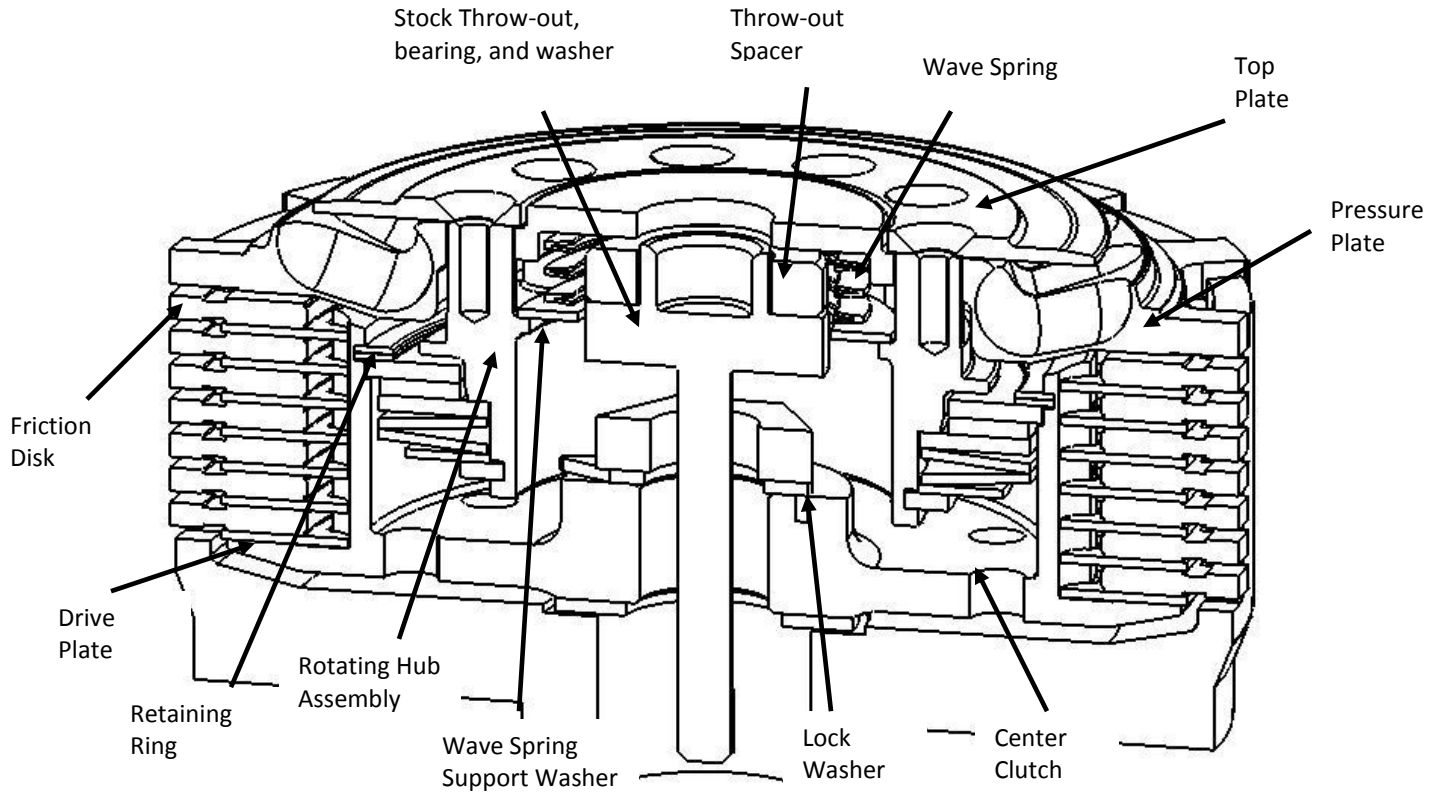

INCLUDED PARTS

Item

- Top Plate
- Pressure Plate
- Rekluse Center Clutch
- Retaining Ring
- (7) RMS Measured Drive Plates
- (1) RMS 0.060" Drive Plate (Adjustment Plate)
- Rotating Hub Assembly
- Rekluse Throw-out Spacer

Item

- (20) 7/16" Chrome Steel Ball Bearings
- Wave Spring Support Washer
- (10) M4x12 Torx Head Screws
- Wave Spring(s) – See tuning Chart
- T-20 Torx Bit
- Blue Loctite 243
- Rekluse Wire Gauges

REQUIRED TOOLS

- 8mm socket
- 8mm Hex key
- 10mm socket
- 12mm socket

- 24mm socket (for center clutch nut)
- T-20 Torx bit (supplied)
- Impact Wrench
- 2 Sets of Feeler Gauges (optional)

BIKE PREPARATION AND DISASSEMBLY

1. Shut off fuel at petcock. Lay bike on left side. **CAUTION:** fuel may drain from carburetor; place a suitable container beneath bike to catch fuel to prevent fire hazard.
2. Remove the rear brake lever.
3. Remove the Clutch Cover.
4. Remove bolts and springs from OEM pressure plate.
5. Remove OEM pressure plate.
6. Remove OEM clutch throw out and set aside. It will be re-installed.
7. Remove the clutch pack (friction disks and drive plates). Separate the friction disks from the pack as they will be re-installed.
8. Remove the OEM center clutch hub following the steps outlined in the vehicle manufacturer's service manual. Also, see the center clutch removal tip sheet (Appendix A) for further assistance.
9. Retain the flat washer and tab lock washer under the center clutch nut as both will be re-installed.
10. Retain OEM thrust washer located between OEM clutch basket and OEM center clutch hub.

NOTE: thrust washer may be stuck to bottom of OEM center clutch hub.

CLUTCH BASKET INSPECTION

Note: The following outlines Clutch Basket Dampener Failure. Some Clutch baskets will last a season, and some last only hours. If the dampeners go unchecked clutch damage will result. After inspecting basket, continue with the z-Start Pro installation.

Clutch Basket Dampener Operation

Most OEM Clutches use elastomer dampeners to protect the clutch from shock loading applied to the basket by the drive train and/or engine during normal operating conditions. The dampeners are located between the clutch basket body and the ring gear. The dampeners take up the slack between the ring gear and clutch basket so that under normal loading they rotate as one. Under extreme loading the dampeners provide a cushion so the ring gear and basket can float independently and keep shock loads from being transferred to the clutch.


As the dampeners wear, the system gains slack and shock loads start getting transferred to the clutch. This creates a hammering effect between the clutch basket and ring gear. The hammering transfers to the clutch plates and causes the plates to wear away at the clutch basket and center clutch hub. If the dampeners continue to go unchecked, the hammering progresses until the clutch fails.

Checking Your Clutch Basket for Dampener Failure

Prior to installing the z-Start, it is recommended that you check the condition of your Clutch Basket and Center Clutch Hub.

An indication of failing clutch basket dampeners is grooving or notching of the Clutch Basket Ears—where the tabs of the friction discs index into the clutch basket. **See the following picture.**

Another indication of failing dampeners is notching of the center clutch hub where the steel drive plates index to it.

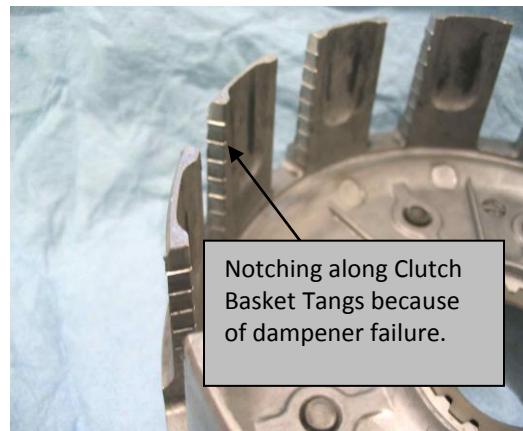

Maintaining Clutch Basket Dampeners

Unfortunately the OEM clutch basket does not provide a means to maintain the dampeners. After the dampeners wear out, the clutch basket must be replaced. The choice is either an OEM clutch basket, or an aftermarket basket. The advantage of an aftermarket basket is that the dampeners are serviceable. Rekluse offers aftermarket clutch baskets specially designed for greater performance with the z-Start Pro.

WARNING: Installing the z-Start into a worn out clutch basket can greatly reduce clutch performance, and damage the z-Start Pressure Plate.

INSTALLING THE Z-START PRO CENTER CLUTCH

11. Install the Rekluse Center Clutch with the OEM thrust washer behind it on top of the basket.
12. Install the OEM external tab lock washer over the main-shaft on top of the Rekluse center clutch.
13. Torque the center clutch nut to the specified torque found in the manufacturer's service manual.
14. Using a pair of adjustable pliers, bend remaining two tabs of external tab washer up against the nut to secure it. **See photo at right.**




INSTALLING THE CLUTCH PACK

15. The 7 Rekluse steel drive plates packaged with the Rekluse Center Clutch come pre-measured and are the 7 steel drive plates you will start with. Install 1 Rekluse steel drive plate onto the Rekluse Center Clutch.


Note: A Rekluse steel drive plate must be the first clutch plate installed.

16. Install the stock friction disks with a Rekluse steel drive plate between each one. **See following chart:**

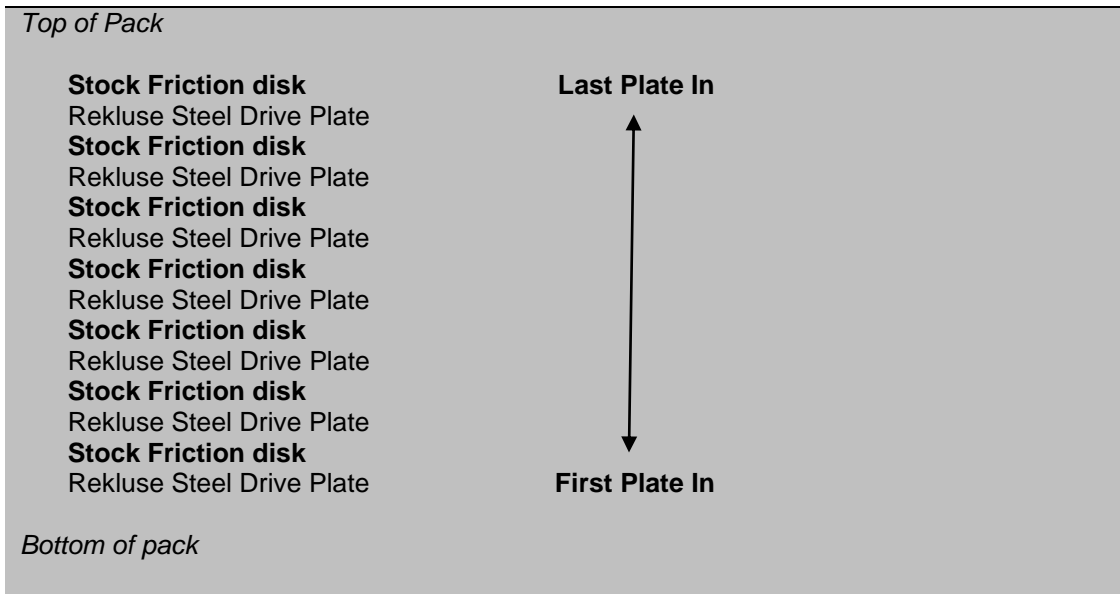


INSTALLING THE Z-START PRO CLUTCH

17. Place lower assembly into Rekluse center clutch hub so the 3 tabs of the lower assembly index into the 3 corresponding cut-outs in the center clutch.

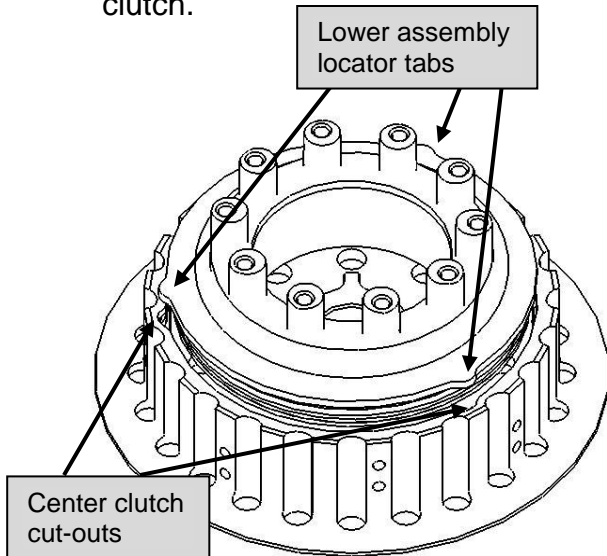

18. Using a pair of mechanics gloves (the edges of the ring can be sharp and may cut you), install the retaining ring into the Rekluse Center Clutch ring groove.

You must ensure the retaining ring is snapped into the groove. Start the square end of the ring and thread the ring into the groove as shown, *ensuring that the scalloped end of the ring is clockwise in relation to the square end.*

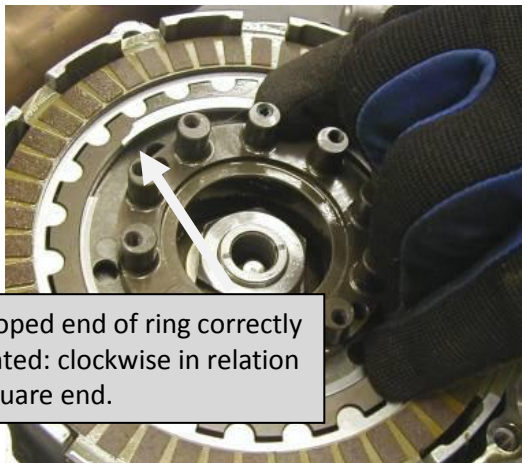

Scalloped end of ring correctly oriented: clockwise in relation to square end.

Threading retaining ring into groove




Use a screwdriver to ensure the ring is seated by sliding along the ring's inner diameter.

WARNING: It is **CRITICAL** that the retaining ring is fully seated using a screwdriver, or clutch damage **WILL** occur.

19. Install OEM clutch throw-out with bearing and washer on top into the transmission shaft. Ensure the needle bearing and flat thrust washer is placed on top of throw-out.
20. Install the Rekluse throw-out spacer on top of the throw-out.
21. Install the Wave Spring Support Washer on top of the rotating hub.


22. Read the Setup and Tuning Guide to determine desired spring setting.
23. Install the C150 wave spring on top of wave spring support washer.

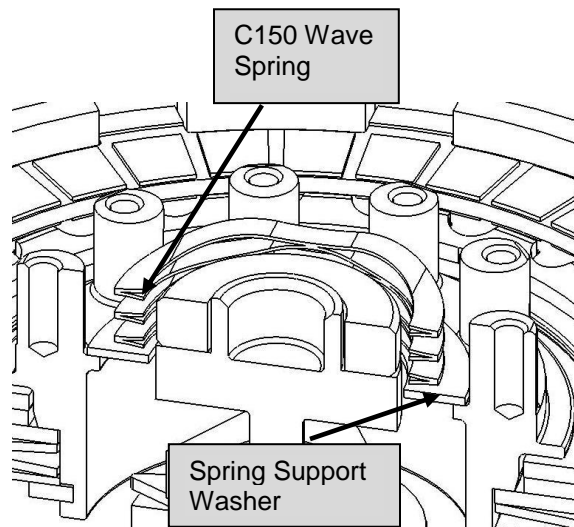

24. Place a small amount of oil into the ball grooves of the Rekluse Pressure Plate.
25. Away from the bike, install the 7/16" steel balls into the pressure plate ball grooves.
26. Place the Rekluse pressure plate, with balls, over the lower assembly. Line the 10 holes in the pressure plate up with the 10 rotating hub posts. Also, line the outer tabs of the pressure plate up with the basket slots. **See photo above right.**



27. While holding down the pressure plate so it is indexed with the basket and 10 rotating hub posts properly, place the Rekluse top plate over the Rekluse pressure plate and thread in 2 torx head screws 180° across from one another. Lightly tighten the 2 screws to secure the Rekluse top plate.

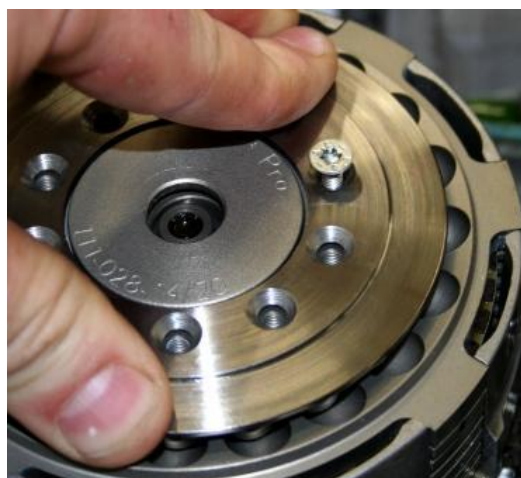


DETERMINE THE INSTALLED GAP OF THE Z-START PRO CLUTCH

Note: Installed gap is measured using two no-go wire gauges. Therefore, if gauges **do not** slide between Rekluse pressure plate and **the pads** of the top friction disk, your **installed gap is correct**.

If gauges **do** slide between the Rekluse pressure plate and **the pads** of the top friction disk, you **need to adjust your installed gap** according to step 30.

28. Verify that top-most friction disk moves up and down freely between the Pressure Plate and top-most steel drive plate by pulling up and down on top-most friction disk. If no “float” exists, top-most drive plate has become disoriented during previous step and needs to be re-installed.
29. Attempt to slide the shorter legs of the 2 included 0.050” no-go wire gauges **between the Rekluse pressure plate and the friction pads** of the top friction disk 180° apart.

If clutch pack wear exists, gauges will slide in with slight resistance. **Do not force the gauges in**, if the gauges **do not** slide in smoothly then the Installed Gap is good and you can move on to Step 31.

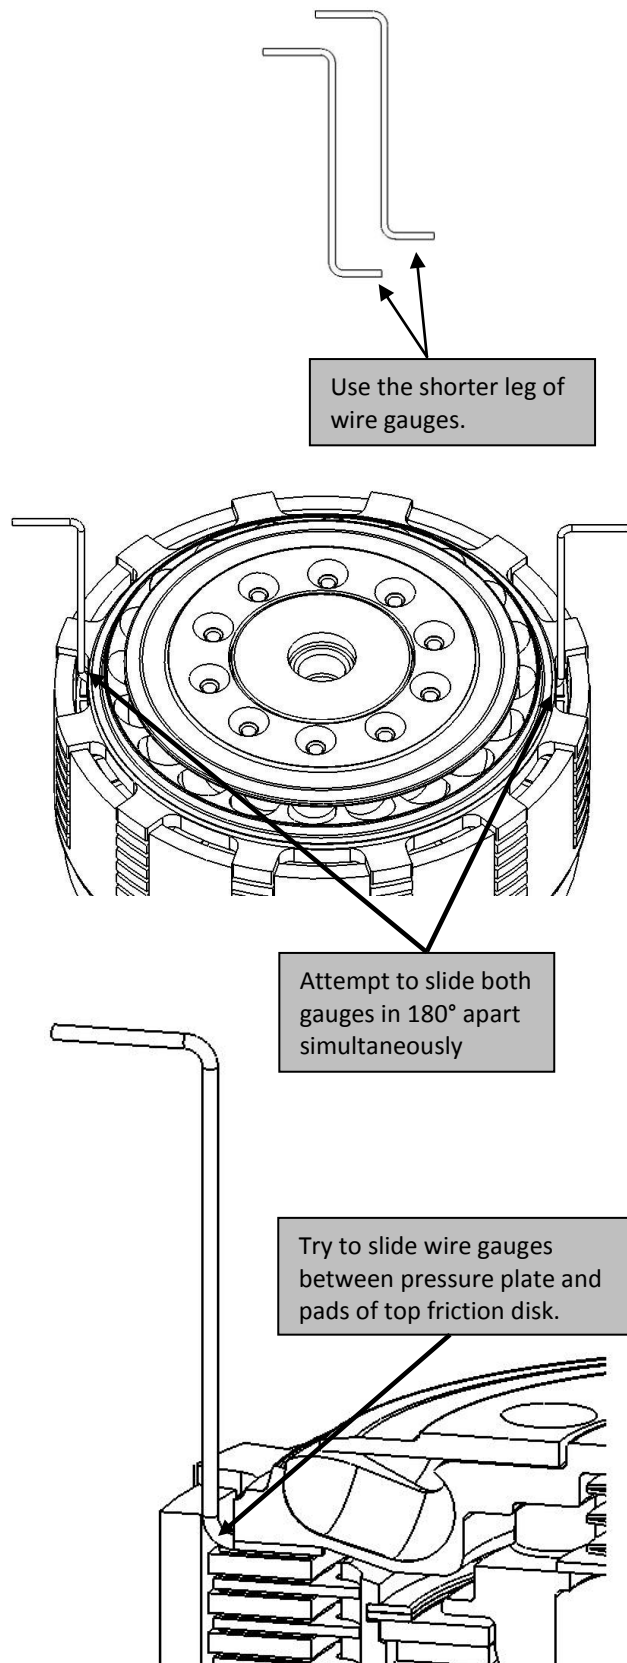

30. If the wire gauges slide in smoothly, the clutch pack needs adjustment. Swap the .060" Rekluse adjustment drive plate for the top drive plate. Repeat step 29.

Note: Once the .060" drive plate has been used, and the clutch wears enough so the wire gauges slide in again, the friction disks will need to be replaced.

31. Install the remaining 8 torx head screws using blue Loctite 243 and torque to **14 in-lbs** (1.17 ft-lbs.).

32. Remove the 2 screws originally installed without Loctite, apply Loctite and torque.

33. Re-install the clutch cover with thicker Rekluse Gasket.

Lightly tighten all of the cover bolts before full torque is applied, or you may break the cover.

WARNING: Thicker Rekluse gasket must be used or you will have clutch cover interference.

Note: Be sure to review the included Break-in and Maintenance Guide for clutch pack wear adjustments.

APPENDIX A – CENTER CLUTCH REMOVAL TIP SHEET

The following covers 3 methods for removing the OEM center clutch from your motorcycle or ATV. **At no time should you ever pry against the standoffs of the OEM center clutch because they are easily broken.**

Note: If your bike has an external tab lock washer, use a flat blade screwdriver to pry the tabs away from the nut. Next use a hammer and punch to lightly tap the tabs flat.

1. Pneumatic or electric impact gun:

Place the bike in gear and remove the nut

2. Clutch Holding Tool:

Example: Motion Pro # 08-0008

Use the clutch holding tool to hold the center clutch while using a wrench to remove the center clutch nut.

3. Holding the Rear Brake:

Place the bike in 4th or 5th gear (a higher gear gives you more mechanical advantage). Apply the rear brake firmly and hold firmly while using a wrench to remove the center clutch nut. A second set of hands is helpful.